


DESCRIPTION

Used in conjunction with the V-1000 series power amplifiers, the VR-1005 permits broadcast to up to 5 zones plus all-call control.

SPECIFICATIONS

Power Requirements	24 V DC
Power Consumption	130 mA
Output	0 dBV, 600 Ω, balanced
Microphone	Gooseneck electret condenser mic with windscreen
AUX Input	-20 dBV, 100 kΩ, unbalanced
Make-contact	5 individual calls + all call, max. 150 mA DC
Chime	4-tone chime, 2-tone chime, gong or 1-tone chime (selectable)
Output Control	5 zones + all-call
Finish	Metallic gold
Dimensions (W×H×D)	224(8.82") × 62(2.44") × 155(6.10") mm, without microphone
Weight	1.1 kg (2.43 lb)
Accessories	Microphone EM-850B(S).....1 Cord clamp.....1 Zone identification labels.....2
Connection Cable	1 twin shielded cable (signal) and up to 17 cables (control and power) (Line resistance : 20 Ω or less, Cable length : 1200 m or less, Outer diameter : 10 mm or less)

APPEARANCE

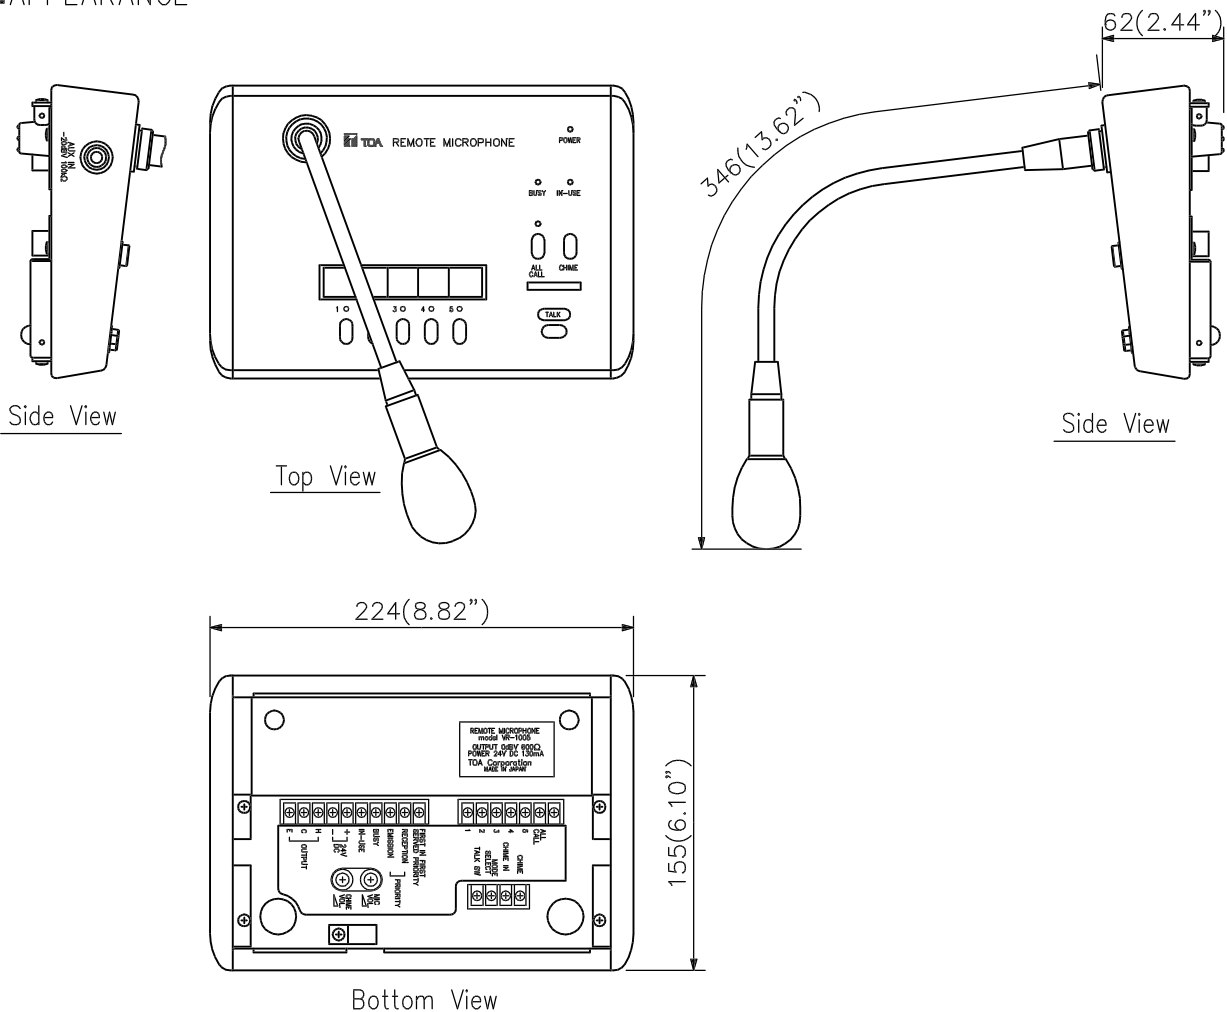

UNIT:mm SCALE:1/4