

WEEKLY PROGRAM TIMER




FEATURES

- **PROGRAM MEMORY AND MEMORY TIME INTERVAL**
You can memory and store the datas for automatic control of this timer. These datas are consist of an melody or voice number, channel number for signal output with operating time and on/off time for outlets. The time interval for memory is 1 minute.
- **VARIETY MELODIES**
You can use one of 11 melodies built in this timer. A playing time of these melodies are 3-45 seconds and you can adjust the playing time for short by use option jumper which placed set inside.
- **VOICE PLAY**
(USING WITH MODEL VF-9104:Voice File Recorder)
If you use this set with model VF-9104, you can play the maximum 15 voices(or musics).
- **SELF TEST**
This set employ an self test function that in order to cheek the memory parts error when initial power on.
- **PROTECT FUNCTION**
In case of you don't want to change the memorized datas, you can protect the datas using by this function.


SPECIFICATIONS

- **ELECTRICAL** *0dB=0.775Vrms
 - Time ErrorLess than ± 2 Seconds/Month
 - Oscillation Frequency32.768kHz
 - Memory Interval1 minute
 - Effective Back-Up TimeOver than 7 days
 - Input Channels5 CH
 - Output Channels4 CH
 - Rechargeable TimeOver than 15 Hours/80mA
 - Melody Output LevelMaximum 1V
 - Output Power of Outlet 1Maximum 500W
 - Output Power of Outlet 2Maximum 30W
- **MELODY NAME AND NORMAL PLAYING TIME**
 - NO 1(Laidler Tanz)About 17 seconds
 - NO 2(Amaryllis)About 24 seconds
 - NO 3(Home on the Range)About 45 seconds
 - NO 4(Green sleeves)About 44 seconds
 - NO 5(Fur Elise)About 25 seconds
 - NO 6(A Maiden's Prayer)About 17 seconds
 - NO 7(Mountain Musician)About 14 seconds
 - NO 8(Holdilidia)About 13 seconds
 - NO 9(ALARM)About 2 seconds
 - NO 10(CHIME)About 2 seconds
 - NO 11(Westminster Chimes)About 16 seconds
- **GENERAL**
 - Power SourceAC 110V-240V, 50/60Hz
 - Power Consumption18W
 - Weight4.5kg
 - Dimensions482(W) × 88(H) × 280(D)mm

PW-9242V

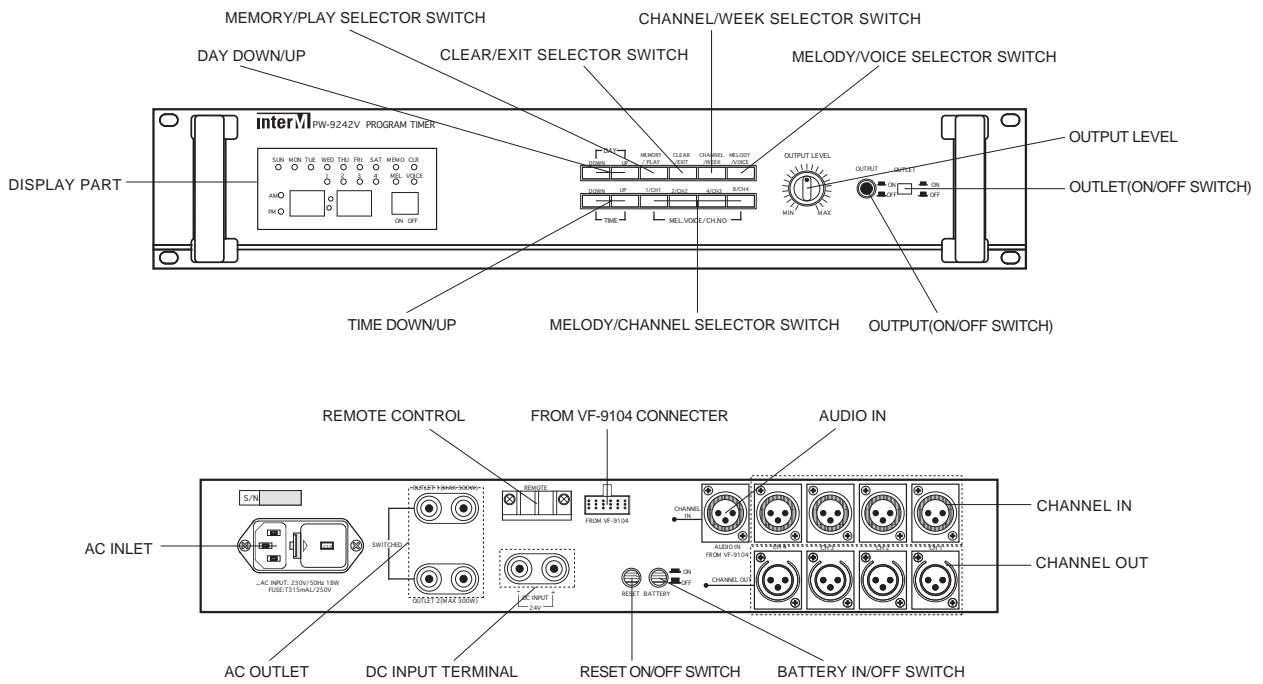

BLOCK DIAGRAM

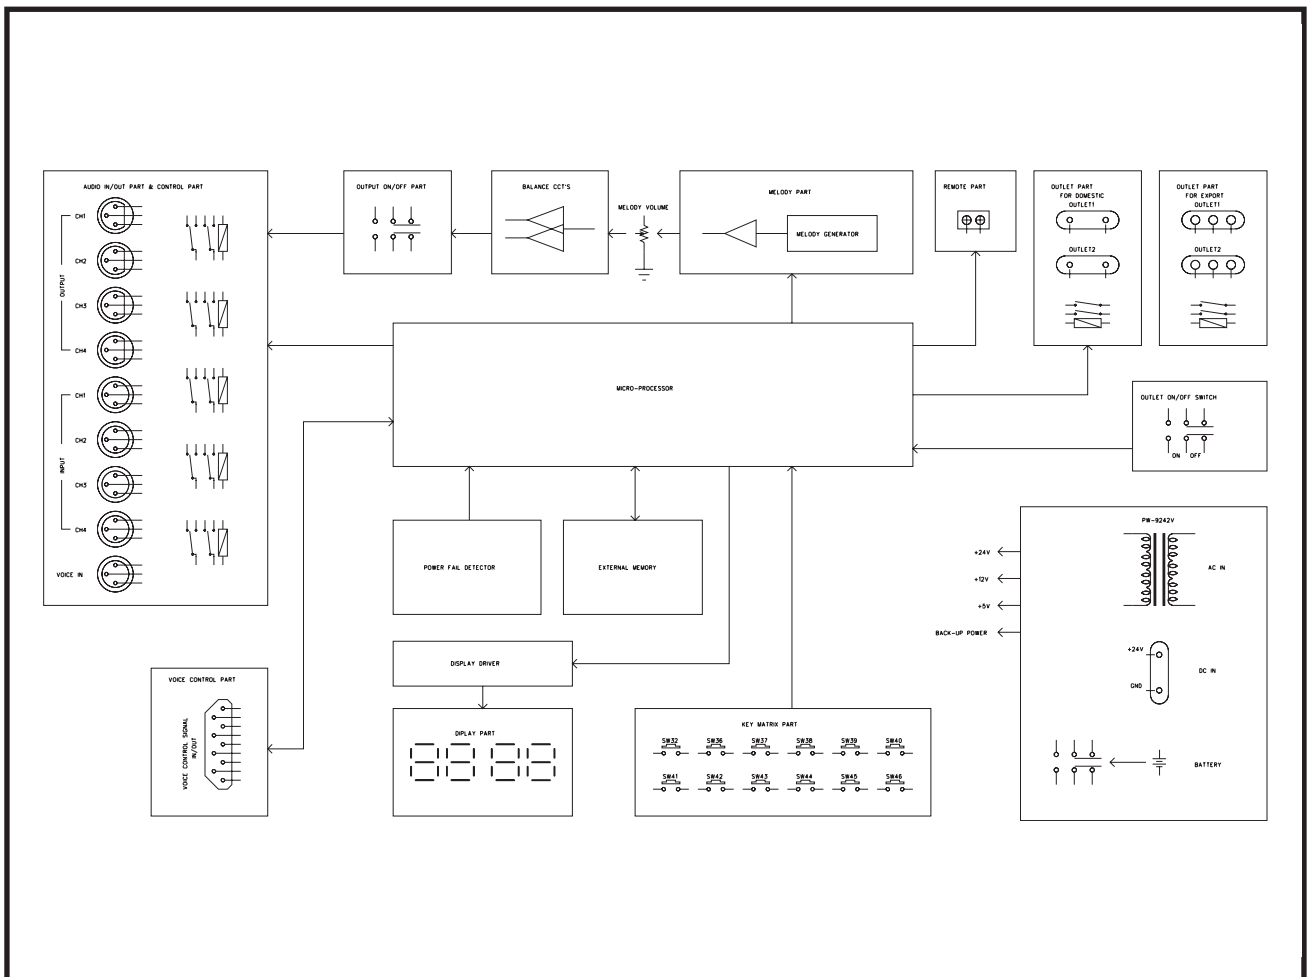

interM

OFFICE : 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA TEL : 82-2-2289-8140~8, FAX : 82-2-2289-8149
 Home page : <http://www.inter-m.com> E-mail : export@inter-m.com

9047919010 A